

Single counterbalance, relief compensated


A-VBSO-SE-CC-30-PL-FC1

08.45.19 - X - Y - Z

RE 18307-49

Edition: 07.2018


Replaces: 09.2017

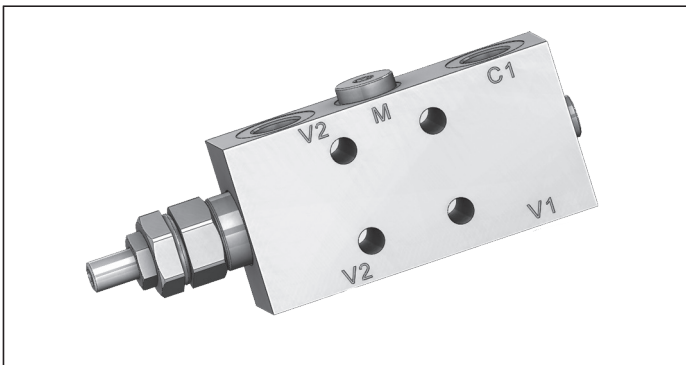

Description

When pressure at V2 rises above the spring bias pressure, the check seat is pushed away from the piston and flow is allowed from V2 to C2. When load pressure at C2 rises above the pressure setting, flow is relieved from C2 to V2. With pilot pressure at V1–C1, the pressure setting is reduced in proportion to the stated ratio of the valve, until opening and allowing flow from C2 to V2. The spring chamber is drained to V2. The valve applies a balanced piston and relief is operated at the valve setting independent of back-pressure at V2. However, the piloted opening of the valve remains subject to additive pressure at port V2. For safety and compactness, the C2 port is gasket mounted the actuator.

Note: port identified with M are not protected with calibrated orifice but in direct connection with pressure channels.




Technical data

Max. operating pressure	410 bar (5945 psi)
Max. flow	60 l/min. (16 gpm)
Weight	see "Dimensions"
Manifold material	Zinc plated steel
Flange seal kit ¹⁾	E00000000000056 (R930060579)
Fluid	Mineral oil (HL, HLP) according DIN 51524
Fluid temperature range	-30 °C to 100 (-22 to 212 °F)
Viscosity range	5 to 800 mm ² /s (cSt)
Recommended degree of fluid contamination	Class 19/17/14 according to ISO 4406
MTTFd	150 years see data sheet 18350-51
Other technical data	see data sheet 18350-50
Relief setting: at least 1.3 times the highest expected load.	

Note: for applications outside these parameters, please consult us.

¹⁾ Seals for 10 valves.

Characteristic curve

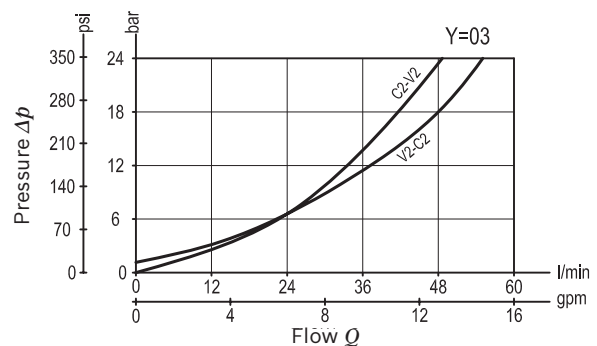

Ordering code

08.45.19	X	Y	Z
-----------------	----------	----------	----------

Single counterbalance,
relief compensated

Pilot ratio

03 4.2 : 1

Port sizes	V1 - V2 - C1	C2	M
02	G 3/8	Ø 9 (0.35)	G 1/4
03	G 1/2	Ø 9 (0.35)	G 1/4

SPRINGS			
	Adj. pressure range bar (psi)	Pres. increase bar/turn (psi/turn)	Std. setting Q=5 (l/min) bar (psi)
20	60-210 (870-3000)	75 (1088)	200 (2900)
35	100-350 (1450-5000)	165 (2393)	350 (5000)

Pressure setting up to 410 bar: code on request.

Tamper resistant cap code
ordering code 11.04.23.003
Mat. no. R930000754




Preferred types

Type	Material number
08451903022000A	R930050435
08451903023500B	R930006213
08451903032000A	R930007175
08451903033500B	R930007174

Type	Material number

Dimensions

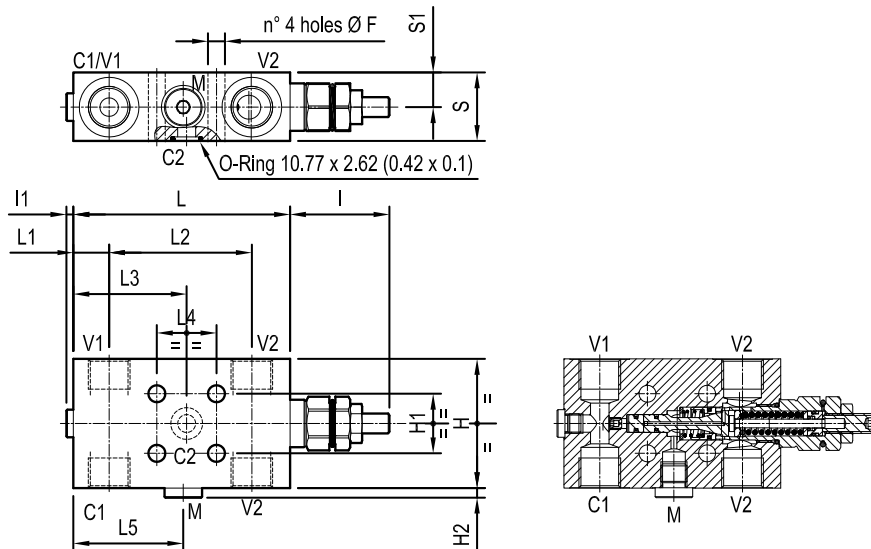

34.5 (1.36)	53.7 (2.11)	30 (1.18)	57 (2.05)	70.3 (2.77)	19.2 (0.76)	109 (4.29)	4.5 (0.18)	50 (1.97)	5 (0.2)	30 (1.18)	65 (2.56)	8.5 (0.34)	G 1/2	1.81 (3.99)
29.5 (1.16)	57.3 (2.26)	30 (1.18)	57.3 (2.04)	70.3 (2.77)	18 (0.71)	109 (4.29)	4.5 (0.18)	50 (1.97)	5 (0.2)	30 (1.18)	55 (2.17)	8.5 (0.34)	G 3/8	1.29 (2.84)
S	L5	L4	L3	L2	L1	L	I1	I	H2	H1	H	F	Y	Weight kg (lbs)

Bosch Rexroth Oil Control S.p.A.

Via Leonardo da Vinci 5
P.O. Box no. 5
41015 Nonantola – Modena, Italy
Tel. +39 059 887 611
Fax +39 059 547 848
compact-hydraulics-pib@boschrexroth.com
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging. Subject to change.